

ZM-9014

REMOTE CONTROL PANEL

Diseñado para uso exclusivo con el amplificador de la serie 9000M2 o M-864D, el ZM-9014 es un panel de control remoto montado en la pared con 4 botones y 1 perilla de control de volumen. Se utiliza junto con el módulo de control remoto RC-001T o M-864D. Se puede montar en una caja eléctrica estándar de 2 fuegos en la pared.



Número de artículo ZM-9014


Specifications

Cable aplicable	Cable blindado CPEV (línea de datos y línea de energía emparejadas) o cable CAT5 de par trenzado para LAN
Fuente de alimentación	24 V DC (supplied from RC-001T)
Consumo de corriente	0,1 A
Indicador	4 indicadores de función, indicadores de nivel
Dimensiones (An x Al x Pr)	72 x 127 x 58,5 mm
Dimensiones (ø x D)	x 58,5 mm
Acabado	Placa de acero, tratado superficialmente, pintado, blanco,

ZM-9014

REMOTE CONTROL PANEL

Appearance

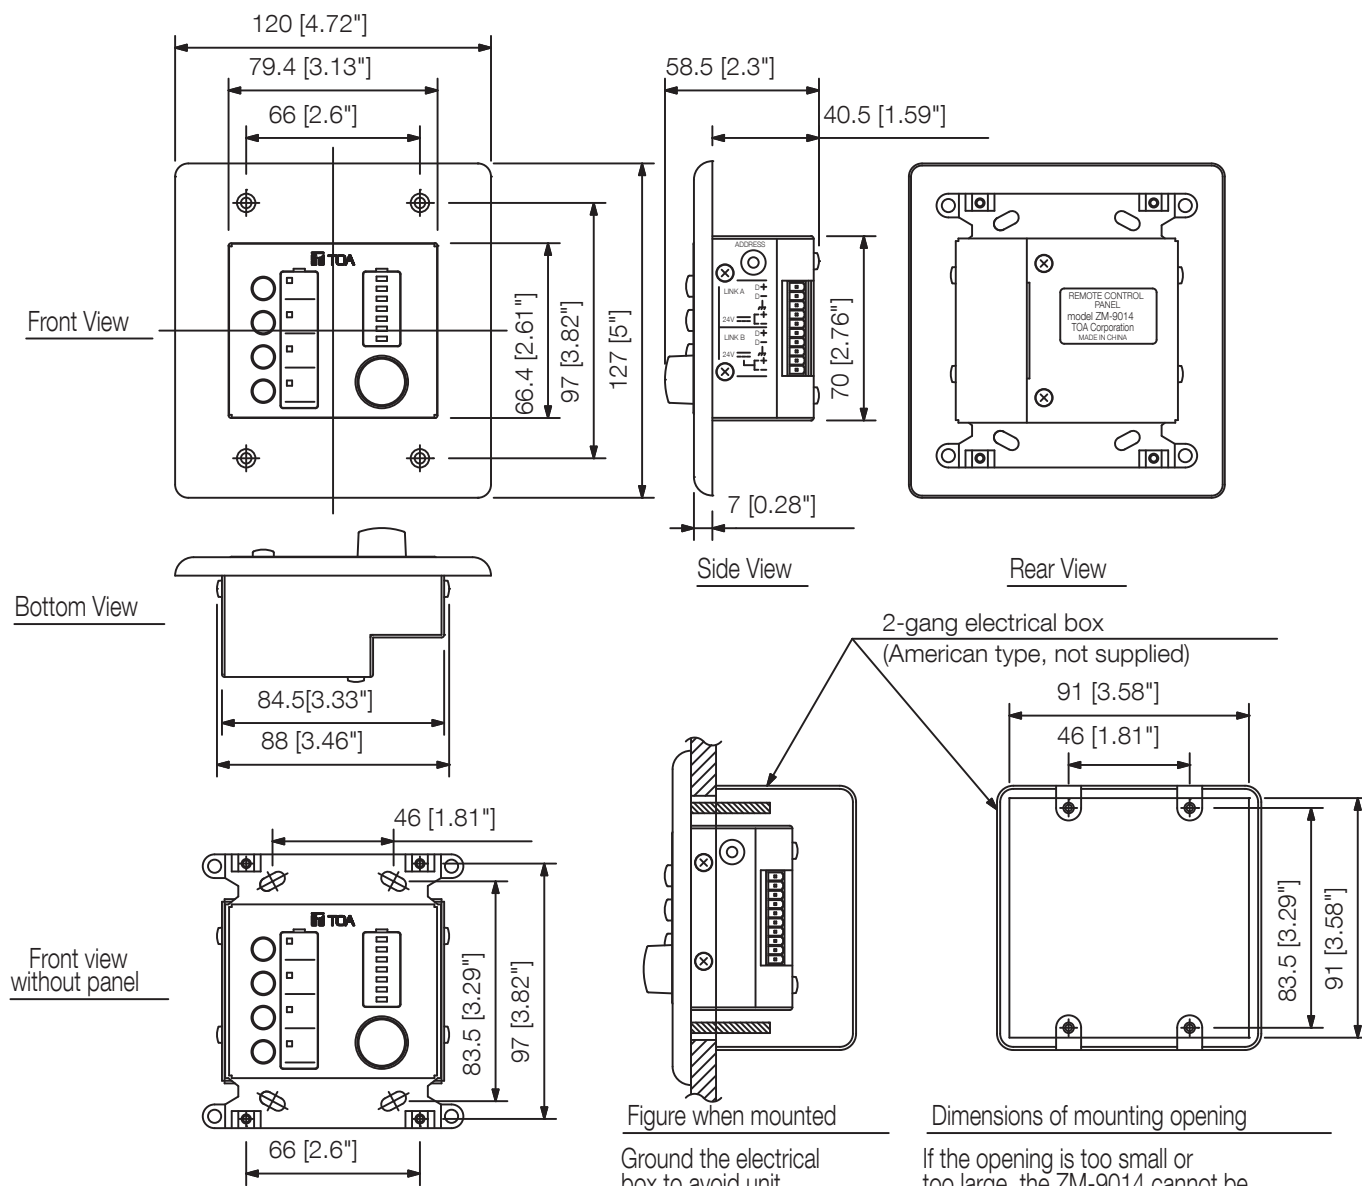

UNIT:mm

SCALE:1/3

Ground the electrical box to avoid unit malfunction due to static electricity.

If the opening is too small or too large, the ZM-9014 cannot be mounted in the wall. Be sure to make an opening with dimensions given above when mounting.